


U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY DOCKET NO. P1909US
<b>TRANSMITTAL LETTER TO THE UNITED STATES</b> <b>DESIGNATED/ELECTED OFFICE (DO/EO/US)</b> <b>CONCERNING A FILING UNDER 35 U.S.C. 371 AND 37 CFR 1.491</b>		U.S. APPLICATION NO. 10/534,437
INTERNATIONAL APPLICATION NO. PCT/FR2003/002928	INTERNATIONAL FILING DATE 06 October 2003 (06.10.03)	PRIORITY DATE CLAIMED 13 November 2002 (13.11.02)
TITLE OF INVENTION ON-LINE SERVICE PROVISION METHOD, AND EQUIPMENT FOR IMPLEMENTING SUCH A METHOD		
APPLICANT(S) FOR DO/EO/US MOUCHEL LA FOSSE, Jean-Pierre		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1. <input type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371 and 37 CFR 1.491.		
2. <input checked="" type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371 and 37 CFR 1.491.		
3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)).		
4. <input type="checkbox"/> The US has been elected (PCT Article 31).		
5. <input type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ul style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ul>		
6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ul style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ul>		
7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ul style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ul>		
8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).		
9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).		
10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).		
11. Nucleotide and/or Amino Acid Sequence Submission <ul style="list-style-type: none"> <li>a. <input type="checkbox"/> Computer Readable Form (CRF)</li> <li>b. Specification Sequence Listing on:             <ul style="list-style-type: none"> <li>i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or</li> <li>ii. <input type="checkbox"/> Paper Copy</li> </ul> </li> <li>c. <input type="checkbox"/> Statement verifying identity of above copies</li> </ul>		
<b>Items 12 to 19 below concern other document(s) or information included:</b>		
12. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <ul style="list-style-type: none"> <li><input type="checkbox"/> Form PTO-1449</li> <li><input type="checkbox"/> Copies of Listed Documents</li> </ul>		
13. <input type="checkbox"/> An assignment for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.		
14. <input type="checkbox"/> A <b>FIRST</b> preliminary amendment. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.		
15. <input type="checkbox"/> A substitute specification.		
16. <input type="checkbox"/> A change of power of attorney and/or address letter.		
17. <input type="checkbox"/> Application Data Sheet Under 37 CFR 1.76		
18. <input checked="" type="checkbox"/> Return Receipt Postcard		
19. <input checked="" type="checkbox"/> Other items or information: Communication; Copy of Patent Application as filed; Supplemental Application Data Sheet		

U.S. APPLICATION NO. 10/534,437		INTERNATIONAL APPLICATION NO. PCT/FR2003/002928		ATTORNEY DOCKET NO. P1509US	
------------------------------------	--	--	--	--------------------------------	--

20. The following fees are submitted: <input type="checkbox"/> a) Basic national fee.....\$300.00 <input type="checkbox"/> b) Examination fee If the written opinion prepared by ISA/US or the international preliminary examination report prepared by IPEA/US indicates all claims satisfy provisions of PCT Article 33(1)-(4).....\$0.00 All other situations .....\$200.00 <input type="checkbox"/> c) Search fee If the written opinion of the ISA/US or the international preliminary examination report prepared by IPEA/US indicates all claims satisfy provisions of PCT Article 33(1)-(4).....\$0.00 Search fee (37 CFR 1.445(a)(2)) has been paid on the international application to the USPTO as an International Searching Authority..... \$100.00 International Search Report prepared by an ISA other than the US and provided to the Office or previously communicated to the US by the IB.....\$400.00 All other situations.....\$500.00  <div style="text-align: right;"><b>TOTAL OF ABOVE CALCULATIONS =</b></div>				Calculations		PTO Use Only							
<input type="checkbox"/> Additional fee for specification and drawings filed in paper over 100 sheets (excluding sequence listing or computer program listing filed in an electronic medium). The fee is \$250.00 for each additional 50 sheets of paper or fraction thereof. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:15%;">Total Sheets</td> <td style="width:15%;">Extra Sheets</td> <td style="width:35%;">Number of each additional 50 or fraction thereof (round up to a whole number)</td> <td style="width:35%;">RATE</td> </tr> <tr> <td>-100=</td> <td>/50=</td> <td></td> <td>x \$250.00</td> </tr> </table>				Total Sheets	Extra Sheets	Number of each additional 50 or fraction thereof (round up to a whole number)	RATE	-100=	/50=		x \$250.00		
Total Sheets	Extra Sheets	Number of each additional 50 or fraction thereof (round up to a whole number)	RATE										
-100=	/50=		x \$250.00										
Surcharge of \$130.00 for furnishing the oath or declaration later than 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$130.00									
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE										
Total Claims	-20=	0	x \$50.00	\$0.00									
Independent Claims	- 3 =	0	x \$200.00	\$0.00									
<input type="checkbox"/> Multiple Dependent Claim(s) (if applicable)			+ \$360.00	\$0.00									
<b>TOTAL OF ABOVE CALCULATIONS=</b>				\$0.00									
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00									
<b>SUBTOTAL=</b>				\$130.00									
Processing fee of \$130.00 for furnishing English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date.				\$									
<b>TOTAL NATIONAL FEE=</b>				\$130.00									
Fee for recording the enclosed assignment. The assignment must be accompanied by an appropriate cover sheet. \$40.00 per property				\$									
<b>TOTAL FEE ENCLOSED=</b>				\$130.00									
08/31/2005 ATRAN1 00000130 070181 10534437 01 FC:1617 130.00 DA				Amount to be: refunded \$									
				charged: \$									

a. <input type="checkbox"/> A check in the amount of \$ to cover the above fee is enclosed. b. <input checked="" type="checkbox"/> Please charge Deposit Account No. 07-0181 in the amount of \$130.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 07-0181. A duplicate copy of this sheet is enclosed. <b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b> <b>SEND ALL CORRESPONDENCE TO:</b>  <div style="display: flex; justify-content: space-between;"> <div>           Customer Number: 08968            Gardner Carton &amp; Douglas LLP            191 N. Wacker Drive, Suite 3700            Chicago, Illinois 60606-1698         </div> <div style="text-align: right;">             Brian C. Rupp, Registration No. 35,665            One of the Attorneys for Applicant(s)            Date: August 26, 2005         </div> </div>	
--	--

U.S. APPLICATION NO.  
10/534,437

INTERNATIONAL APPLICATION NO.  
PCT/FR2003/002928

ATTORNEY DOCKET NO.  
P1909US

**CERTIFICATION UNDER 37 CFR 1.10**

"Express Mail" Label Number: EV264893995US

Date of Deposit: August 26, 2005

I hereby certify that this express request to begin national examination procedures under 35 U.S.C. 371(f) of the International Patent Application referenced above, including all of the items listed thereon as enclosures, is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to Mail Stop PCT, Attention: DO/EO/US, Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450.

Zenash S. Kebede

Printed Name of Person Signing:

  
Signature

**EXPRESS MAILING CERTIFICATE  
UNDER 37 CFR § 1.10**

**Date of Deposit: August 26, 2005**

**"Express Mail" Mailing Number: EV264893995US**

I hereby certify that the attached correspondence, including any documents or materials referred to thereon as enclosures or attachments, is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to:

Mail Stop PCT  
Attn: DO/EO/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Title: ON-LINE SERVICE PROVISION METHOD, AND EQUIPMENT FOR  
IMPLEMENTING SUCH A METHOD

Applicant(s): Jean-Pierre Mouchel La Fosse

Application No.: 10/534,437 (U.S. National Phase of PCT/FR2003/002928)

Filing Date: May 10, 2005

Enclosed:

1. Transmittal Letter to the United States Designated/Elected Office (DO/EO/US) Concerning a Filing Under 35 USC 371 and 37 CFR 1.491 (3 pgs) and duplicate thereof (3 pgs)
2. Communication (2 pgs) and duplicate thereof (2 pgs)
3. Executed Combined Declaration and Power of Attorney (3 pgs)
4. Copy of Patent Application as Filed (32 pgs)
5. Supplemental Application Data Sheet (3 pgs)
6. Authorization to charge deposit account in the amount of \$130.00
7. Return postcard

Zenash Kebede  
Typed or Printed Name

Zenash Kebede  
Signature

Attorney Docket No. **P1909US**  
Client No. 084526-1909  
CH02/ 22405604.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Jean-Pierre Mouchel La Fosse

Art Unit: 3625

Application No. 10/534,437

Examiner: Unassigned

Filed: May 10, 2005

For: ON-LINE SERVICE PROVISION METHOD,  
AND EQUIPMENT FOR IMPLEMENTING  
SUCH A METHOD

COMMUNICATION

Mail Stop PCT  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Dear Sir:

Applicant hereby submits an executed Combined Declaration and Power of Attorney.  
**No invitation to furnish an oath or declaration was received from the Patent Office.**

The items checked below are appropriate:

1. **Status of Applicant**

This application is on behalf of ☒ other than a small entity or ☐ a small entity.

2. **Documents Submitted Herewith**

- a. ☒ Executed Declaration of inventor(s)  
b. ☒ Other: Copy of Patent Application as filed; Supplemental Application  
Data Sheet

3. **Fees**

**Late Filing of Oath or Declaration**

Pursuant to 37 CFR 1.16(e), the surcharge for late filing of the oath or declaration for  
☒ other than a small entity or ☐ a small entity is \$130.00.

**Fee Due** \$130.00

**4. Extension of Time**

- ☐ Applicant petitions for a one-month extension of time under 37 CFR 1.136, the fee for which is.
- ☒ Applicant believes that no extension of time is required. However, this conditional petition is being made to provide for the possibility that applicant has inadvertently overlooked the need for a petition and fee for extension of time.

**Fee Due** \$0.00

**5. Total Fee Due**

The total fee due is:

Late Filing of Declaration Surcharge	\$130.00
Extension of Time Fee	\$ 0.00

**Total Fee Due: \$130.00**

**6. Fee Payment**

- ☐ Attached is a check in the sum of \$ .
- ☒ Charge Account No. 07-0181 the sum of \$130.00. A duplicate of this transmittal is attached.

**7. Fee Deficiency**

- ☒ If any additional fee is required in connection with this communication, charge Account No. 07-0181. A duplicate of this transmittal is attached.



Brian C. Rupp, Reg. No. 35,665  
One of the Attorneys for Applicant(s)  
GARDNER, CARTON & DOUGLAS LLP  
191 N. Wacker Drive, Suite 3700  
Chicago, Illinois 60606-1698  
(312) 569-1000 telephone  
(312) 569-3000 facsimile  
Customer No.: 08968

Date: August 26, 2005

In re Appln. of Jean-Luc Mouchel La Fosse  
Application No. 10/534,437

**Certification under 37 C.F.R. § 1.10**

EV264893995US

August 26, 2005


*Express Mail mailing number*

*Date of Deposit*

I hereby certify that the attached COMMUNICATION, including any documents or materials referred to thereon as enclosures or attachments, is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to Mail Stop PCT, Attn.: DO/EO/US, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Zenash Kebede

*(Typed or printed name of person making deposit)*



*(Signature of person making deposit)*

CH02/ 22405593.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No. :

U.S. National Serial No. :

Filed :

PCT International Application No. : PCT/FR2003/002928

VERIFICATION OF A TRANSLATION

I, Charles Edward SITCH BA,

Deputy Managing Director of RWS Group Ltd UK Translation Division, of Europa House, Marsham Way, Gerrards Cross, Buckinghamshire, England declare:

That the translator responsible for the attached translation is knowledgeable in the French language in which the below identified international application was filed, and that, to the best of RWS Group Ltd knowledge and belief, the English translation of the international application No. PCT/FR2003/002928 is a true and complete translation of the above identified international application as filed.

I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application issued thereon.

Date: March 18, 2005

Signature :



For and on behalf of RWS Group Ltd

Post Office Address :

Europa House, Marsham Way,  
Gerrards Cross, Buckinghamshire,  
England.



(19) World Intellectual Property Organization  
International Bureau



(43) International publication date  
3 June 2004 (03.06.2004)

PCT

(10) International publication number  
WO 2004/047369 A1


- (51) International patent classification<sup>7</sup>: H04L 12/28, 12/56  
(21) International application number: PCT/FR2003/002928  
(22) International filing date: 6 October 2003 (06.10.2003)  
(25) Language of filing: French  
(26) Language of publication: French  
(30) Data relating to the priority:  
02/14,210 13 November 2002 (13.11.2002) FR  
(71) Applicant (for all designated States except US): FRANCE  
TELECOM [FR/FR]; 6, place d'Alleray, F-75015 Paris (FR).  
(72) Inventor; and  
(75) Inventor/Applicant (US only): MOUCHEL LA  
FOSSE, Jean-Pierre [FR/FR]; 2, allée du Verger,  
F-78114 Magny Les Hameaux (FR).  
(74) Representatives: LOISEL, Bertrand et al.; Cabinet  
Plasseraud, 65/67 rue de la Victoire, F-75440 Paris  
Cedex 09 (FR).  
(81) Designated states (national): AE, AG, AL, AM, AT,  
AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO,  
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,  
MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ,

[continued on next page]

As printed

(54) Title: PROVISION OF SERVICES

(54) Titre : FOURNITURE DE SERVICES

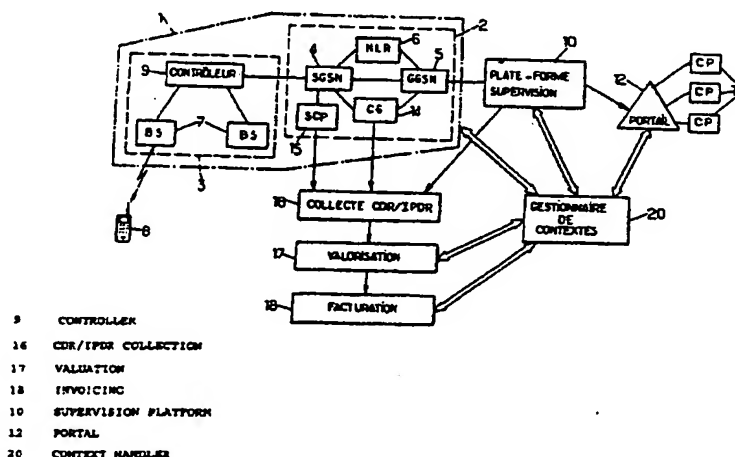

(57) Abstract: The invention relates to the provision of services. According to the invention, a service session supervision platform (10) is disposed between an access network (1) and an input node (12) of a service-hosting network. During the provision of a service, at least one atomic section is first defined, said section consisting of a determined sequence of events which are involved in message exchanges with a subscriber. The supervision platform detects and flags events forming the beginning or end of an atomic section in a service session in progress for a subscriber by means of the access network. A communication interrupt request from a subscriber is processed by ascertaining if an atomic section is in progress for said subscriber according to the atomic section beginnings and ends flagged by the supervision platform, in order to determine whether or not the communication must be interrupted immediately.

(57) Abrégé : Une plate-forme de supervision de sessions de service (10) est placée entre un réseau d'accès (1) et un noeud d'entrée (12) d'un réseau d'hébergement de services. On définit a priori, dans le déroulement d'un service, au moins une section atomique consistant en une séquence d'événements déterminée intervenant dans des échanges de messages avec un abonné. La plate-forme

[Suite sur la page suivante]

[continued on next page]

OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated states (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *With International Search Report.*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.*

**Declaration under Rule 4.17**

- *of inventorship (Rule 4.17(iv)) for the following designation US*

ON-LINE SERVICE PROVISION METHOD, AND EQUIPMENT FOR  
IMPLEMENTING SUCH A METHOD

The present invention relates to on-line service mediation techniques.

5 In particular, it relates to content services that can be supplied via third generation (3G) cellular radio communication networks of the UMTS type (Universal Mobile Telecommunications System). It is more generally of interest to Internet service providers (ISP),  
10 whether the subscriber access is by radio, by wire or by other means. The term "3G services" is used below to denote the services affected by the invention, without this being in any way limiting.

The rating of these services is difficult to perfect.  
15 The service providers put in place an information system (IS) to deal with customer care and billing (CC&B). These ISS provide them with the ability to rate the 3G services with a large number of metrics available to differentiate these services in terms of  
20 rating and billing.

For this, the manufacturers offer platforms to provide SCP-type content mediation (SCP being an intelligent network term standing for "service control point"). These manufacturers include NARUS, ENITION, VoluBill,  
25 P-Cube, etc.

All these platforms provide a functionality for analyzing and supervising IP (Internet Protocol) packets exchanged within the context of 3G service sessions initiated by the user of a 3G terminal or of a  
30 workstation connected to the Internet. They have the ability to analyze the information encapsulated in the IP packets up to layer 7 (Application) of the OSI

- 2 -

protocol architecture model. This enables them to apply rating metrics taking into account IP addresses, TCP (Transmission Control Protocol) ports, URL (Uniform Resource Locator) resources, etc.

- 5 These platforms are normally incorporated in the same place in the IS domain of the CC&B: between the endpoint node of the access network (3G cellular or fixed line), and the first node of the IP network hosting 3G services (ISP network or Internet network).  
10 This first input node in the 3G services IP network is most often a 3G services "portal".

- Some of these platforms, for example the "NetToll" platform marketed by ENITION, have a functionality enabling the 3G service provider to be autonomous in  
15 the phase of creating his 3G services. A protocol (called "NetPolicy" in the case of the "NetToll" platform) enables the 3G service provider to define and create all the data that makes up the information model of his new 3G service. The 3G service provider thus  
20 himself creates all the data relating to the new service in the database forming the service reference base of the "SCP-Like Content Mediation" platform.

For the rating of 3G services, the most difficult problems to resolve in this IS domain of the CC&B stem:

- 25 - from the current impossibility of guaranteeing a quality of service (QoS) that is completely deterministic for the "delivery" of the 3G services;  
- from the "multi-session" nature of the  
30 technologies supporting these services (UMTS and its upgrades, or IP fixed networks). This means that, for example, the end user of a 3G terminal (mobile phone, personal digital assistant, etc.) can set up a plurality of 3G service sessions

- 3 -

running in parallel.

Any mechanism that helps to improve the QoS perceived by the user who sets up 3G service sessions is desirable to facilitate the hitherto slow take-off of the 3G services.

A particular problem is that of the perception by the end user of certain communication interruptions which can be due to various reasons. In the absence of particular precautions, there is a risk of such an interruption being perceived very abruptly by the customer, which may discourage the customer from subscribing to this type of service. The success of a new 3G service runs the risk of being compromised if it brings into play circumstances in which such an abrupt interruption is particularly disagreeable to the customer (for example, if he does not know whether his bank account has been debited).

The 3G service session interruption decision situations include in particular the following:

- 20       - detection by the rating system that a zero threshold is reached on the account associated with the rating of a service (for example, the account associated with the rating of the service transport part);
- 25       - certain legal obligations, such as the protection of underage persons with respect to "addictive" behaviors that urge them toward excessive consumption;
- 30       - for companies, the needs to protect and monitor the consumption of "enterprise" type 3G services by their field or office employees etc.

An object of the present invention is to propose a

- 4 -

mechanism for improving the ergonomics of the on-line services, in particular in cases of involuntary communication interruption.

The invention thus proposes an on-line service provision method, wherein in particular a service session supervision platform is placed between an access network and an input node of a service-hosting network. This method comprises the following steps in relation to at least one service:

- 10       - a priori defining, in the running of said service, at least one atomic section consisting of a determined sequence of events which are involved in message exchanges with a subscriber, and identifying a first event at the start of the atomic section and at least one second event at 15       the end of the atomic section; and
- 20       - configuring the supervision platform so that it detects the events identified in a session of said service in progress for a subscriber via the access network and flags a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event.
- 25       According to the invention, a communication interrupt request from a subscriber is processed by ascertaining whether an atomic section is in progress for said subscriber according to the atomic section beginnings and ends flagged by the supervision platform, in order 30       to determine whether the communication must at least partly be interrupted immediately, that is to say whether some or all of the current sessions must be interrupted immediately.

If a service is interrupted in the middle of a sequence

- 5 -

forming a semantically uniform and meaningful whole, this service is perceived as corrupted and aborted in an indeterminate state by its customer. More specifically, a more in-depth analysis shows that numerous examples of 3G services thus contain sequences that cannot be interrupted without damage from the point of view of the QoS perceived by their consumer.

Such a sequence is here called an "atomic section" in reference to the terminology used in transaction-oriented information processing techniques, in which the atomicity of a transaction means that it must be considered as an indivisible operation, which can only be run in its entirety, or, failing this, be cancelled in its entirety.

The atomic sections do not necessarily relate to all of the services that can be accessed via the hosting network, but only those of these services for which there are sequences where the concept of atomicity applies.

As an example, services that use bids are run according to a generic schema normally comprising the following steps:

- A/ the bidding application server proposes its bids;
- B/ the customer notifies his desire to make a bid and sends a message to "deposit" his bid;
- C/ the bidding application server notifies the customer that the bid has been "deposited" as it was received, and requests confirmation of this bid by the customer;
- D/ the customer sends his confirmation;
- E/ the server notifies "closure" of the bid deposited and confirmed by the customer;

- 6 -

F/ subsequently, the server notifies the customer of the result of his bid.

In this sequence of steps, it can be seen that, from step B/ to step E/, any interruption of the session supporting this bidding service will be perceived abruptly by the customer. Often, this customer does not know the exact status of the bid as it will be processed by the application server. Such uncertainty is by its very nature likely to make him reject the service.

For this bidding service, the sequence of events from step B/ to step E/ can therefore be qualified as an atomic section. A supervision platform, for example of the "SCP-like content mediation" type, can be arranged and configured according to the invention to detect such events, for example by examining as far as the application layer the IP packets exchanged with the customer during the session, and flagging them so that the interrupt requests that are likely to occur are processed wisely.

This processing of the interrupt requests involving the atomic sections can be performed in the IS of the CC&B at different levels: access network operator, ISP, content provider, content aggregator, site host, etc., according to whether these players are responsible for the rating of a certain part of the service as delivered.

As early as the design phase of a 3G service, the designer is normally able to identify all the atomic sections of this service. Furthermore, he is in a position to determine which event or action constitutes the point of entry into an atomic section, and which event or action characterizes the point of exit from



- 7 -

the atomic section, and therefore to define the parameters used in the method. The method thus provides the 3G service developer with a toolbox with which he can, depending on the semantics of his service,  
5 parameter the supervision platform to avoid unwanted service interruptions.

It is considered that most of the on-line market-standard 3G services contain this concept of atomic section and therefore potentially benefit from the  
10 invention. Such is also the case for other services, in particular multimedia.

The communication relevant to the decision, taken by considering the existence or not of an atomic section for the subscriber, can relate to all of the current  
15 sessions for this subscriber or to just some of these sessions. If the request concerns the interruption of one session only, the examination of the atomic section condition can be limited to the session concerned.

Often, the request relates to all the sessions, for  
20 example, because it originates from the service transport rating. If there is an atomic section in progress in a service session, this session can be maintained (temporarily) while any other sessions in progress (with no atomic section at the time in  
25 question) can be interrupted immediately. The handler could also decide to maintain these other current sessions, particularly if they relate to related services.

The context handler can, in particular, observe a  
30 hierarchical structure of the services taken into account by the service rating devices. For example, in certain systems, the concept of "service cone" corresponding to a set of services likely to be

- 8 -

involved in the context of a session of a given service (cone summit) is known. For example, the transport service can be seen as the apex of a cone made up of the transported services. One of these transported services can itself be the apex of a cone, which means that, while it is running, it can offer to access or return to other dependent services (belonging to this cone). In an embodiment of the invention, the processing of an interrupt request for a service S thus includes an analysis by the context handler of any atomic sections that might exist for sessions of any service belonging to the smallest of the nested cones including this service S, and the temporary maintenance of the current sessions for the services of this smallest cone if there is such an atomic section. The data specifying this cone can be at least partly accessible to the context handler so that it can perform this analysis. This analysis of the service hierarchy can also be undertaken by the entity originating from the interrupt request, which accordingly selects the sessions or the services for which the interruption is required.

Another aspect of the present invention relates to an on-line service control system, comprising a service session supervision platform placed between an access network and an input node of a service-hosting network, and a context handler to communicate with different functional units including the supervision platform in order to store information on service sessions in progress for subscribers via the access network. At least one atomic section consisting of a determined sequence of events which are involved in message exchanges with a subscriber is a priori defined in the running of at least one service by identifying a first event at the start of the atomic section and at least one second event at the end of the atomic section. The

- 9 -

supervision platform includes means for detecting the events identified in a session of said service in progress for a subscriber via the access network and for flagging to the context handler a start of atomic  
5 section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event. The context handler includes means of keeping an atomic section indicator  
10 stored for each subscriber up-to-date on the basis of atomic section beginnings and ends flagged by the supervision platform and of processing a communication interrupt request from a subscriber according to the atomic section indicator stored for said subscriber in  
15 order to determine whether the communication must at least partly be interrupted immediately.

Another aspect of the present invention relates to a service session supervision platform for an on-line service control system, comprising:

- 20 - means of connection on the one hand to an access network and on the other hand to an input node of a service-hosting network;
- means of receiving specification elements of at least one atomic section in at least one on-line  
25 service, consisting of a determined sequence of events which are involved in message exchanges with a subscriber in the running of at least one service, said specification elements describing a first event at the start of the atomic section  
30 and at least one second event at the end of the atomic section;
- means of analyzing traffic passing between the access network and the input node of the service-hosting network to detect said first and second  
35 events in a session of said service in progress

- 10 -

for a subscriber via the access network; and

- means of communication with a context handler storing information on service sessions in progress for subscribers via the access network, including at least one atomic section indicator, to flag to the context handler a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event.

Another aspect of the present invention relates to a context handler for an on-line service control system, comprising:

- means of communication with different functional units including a service session supervision platform placed between an access network and an input node of a service-hosting network;
- means of storing information on service sessions in progress for subscribers via the access network, said information including, for at least one service session in progress for a subscriber, an atomic section indicator kept up-to-date on the basis of atomic section beginnings and ends flagged by the supervision platform; and
- means of processing a communication interrupt request from a subscriber according to the atomic section indicator stored for said subscriber in order to determine whether the communication must at least partly be interrupted immediately.

The developer can also, using this agent, define a maximum duration considered to be normal for a given atomic section.

Another aspect of the present invention relates to a

- 11 -

software agent for an on-line service developer, comprising instructions for performing the following operations on running the software agent in a computer machine communicating with a service session  
5 supervision platform placed between an access network and an input node of a service-hosting network:

- 10 - determination, in the running of a service, of at least one atomic section consisting of a determined sequence of events which are involved in message exchanges with a subscriber;
- identification of a first event at the start of the atomic section and at least one second event at the end of the atomic section; and
- 15 - configuration of the supervision platform so that it detects the events identified in a session of said service in progress for a subscriber via the access network and flags a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic  
20 section for said subscriber in response to the detection of a second event.

Other features and advantages of the present invention will become apparent from the description below of non-limiting exemplary embodiments, with reference to the  
25 appended drawings, in which:

- figure 1 is a diagram of a system according to the invention and its environment;
- figure 2 is a diagram illustrating operations implemented in an exemplary system according to  
30 the invention for keeping an atomic section indicator up-to-date; and
- figure 3 is a flow diagram of a communication interrupt request processing procedure that can be used in a system according to the invention.

- 12 -

In the application of the invention described below, the services concerned are 3G services delivered to subscribers via a UMTS type access network 1. It will be understood that the access technology available to  
5 the subscribers can in fact be of any kind (local or wide area network, wired or wireless network, etc.).

A UMTS type third generation cellular radio network comprises on the one hand a core network 2 and on the other hand a radio access network 3. The core network 2  
10 presents similarities with the GPRS (Generalized Packet Radio Service) technology, and thus includes a set of meshed switches called GSN (GPRS Support Node) including serving nodes 4, or SGSN (Serving GSN), linked to the radio access network 3 and gateway nodes  
15 5, or GGSN (Gateway GSN), linked to external networks such as on-line service provision networks or the Internet. Some of the switches of the core network are linked to a subscriber database 6 (Home Location Register, HLR) used to manage the mobile subscribers of  
20 the cellular network. The radio access network 3, of UTRAN (UMTS Terrestrial Radio Access Network) type, for example, is made up of radio base stations 7 distributed over the coverage area of the network to offer radio links with the 3G terminals 8 and base  
25 station control units 9 linked to SGSNs 4.

At the interface between a GGSN 5 and an external network, there is often a service session supervision platform 10 of the "SCP-like content mediation" type. In the example represented in figure 1, this platform  
30 10 is placed between the GGSN 5 and an Internet portal 12 giving access to services provided by various content providers (CP) 13.

The 3G terminals are designed to operate according to the IP protocol. The first router seen by the terminals

- 13 -

of the subscribers of the operator managing the portal is the GGSN 5. The supervised IP traffic exchanged by these terminals 8 thus passes through the supervision platform 10 which is able to detect all sorts of events in this traffic. The events taken into account are programmable and the platform 10 offers the service developer programming tools with which to configure these events and the behaviors to be adopted when they are detected.

Conventionally, the switches of the core network 2 are linked to cellular service rating devices, either directly, or via a charging gateway (CG) 14, or via a service control point (SCP) 15 of an intelligent network architecture. These rating devices include, for example, a unit 16 for collecting call detail records (CDR) from the core network 2 and/or IP detail records (IPDR) resulting from the IP traffic analysis performed by the supervision platform 10, a rating system 17 which generates accounting data from the CDRs and IPDRs collected, and a billing system 18 for producing the customer bills from the rating elements supplied by the system 17.

The "SCP-like content mediation" type supervision platform 10 is provided with capabilities to implement all or most of the metrics representative of the rating of the 3G services. It generates CDRs, IPDRs or any other format of record intended for the rating system 17.

In some cases, rating devices can provoke an interruption of the information transport service for a given mobile subscriber. This may, for example, occur when the rating system 17 detects that a zero threshold has been reached in the account associated with the rating of the transport of the 3G service sessions for

- 14 -

the subscriber. Such interruptions can also occur at the request of other CC&B components.

Other interrupt request cases can be induced by rating devices taking account of the 3G services. In particular, interrupt requests can take into consideration a service cone concept as described previously, either in how to generate these requests in the rating devices, or in how they should be processed.

The IS domain of the CC&B has the capability to deal with such session interruption cases non-abruptly, based on a real-time knowledge of the state of the sessions initiated by the user of the 3G terminal. More specifically, the invention provides for a functionally centralized mechanism for managing the context of all the service sessions initiated by each 3G subscriber. An IS component of the CC&B domain (in the broad sense) must therefore host and manage centrally the 3G service session contexts. This IS functional component 20 is here called a "context handler".

According to the invention, the context handler 20 is kept informed in real time of the starts and ends of atomic sections by the supervision platform 10, and it keeps, for each current 3G session for a subscriber, a Boolean variable up-to-date, the value of which indicates whether that session is in an atomic section.

An IS component issuing a session interrupt request (for example, the rating system 17) then transmits its request to the context handler 20 which looks at the overall situation of the activities of the subscriber. If one of his active sessions is in an atomic section, then the context handler 20 will be able to wait for the end of this atomic section before passing on the interrupt command, in accordance with an economic logic



- 15 -

of the service concerned. A guard timer can be provided to protect the operator against an abnormally lengthy use of an atomic section.

5 The above mechanism therefore provides the operator with technical means enabling him to control and differentiate the processing of 3G service session interruption cases.

10 The context handler 20 can be incorporated in an existing IS component of the operator, such as the supervision platform 10 or the portal 12. It can also form a separate element as shown diagrammatically in figure 1.

15 The method requires an appropriate design and programming of the supervision platform 10 for it to detect events interpreted as starts and ends of atomic sections for each session of each subscriber.

20 The atomic sections are first identified by the designer of a 3G service, as are the events that mark their start and end. His application server can have an "agent" enabling him to communicate with the "SCP-like content mediation" type platform 10 to specify different events to be detected in the IP traffic related to the service (start/end of service session, start/end of each atomic section in such a session, etc.) and the actions required, including notifications  
25 to be addressed to the context handler 20 for it to keep the context of the sessions in progress up-to-date for the subscriber. The service provider can thus define, with an appropriate and secured application  
30 protocol, the data of the information model of his service.

A number of procedures can be used by the software

- 16 -

agent made available to the service designer or developer. One possibility consists in submitting forms of predefined format, for example in the form of HTML (HyperText Markup Language) pages, that the agent  
5 completes and transmits to the platform 10 on the basis of data entered by the user. Another possibility consists in providing an exchange of successive messages between the agent and an additional software module of the platform 10 during which the agent sets  
10 up a communication session with the platform, enabling the user to indicate first his desire to specify an atomic section for a given server and then to be questioned to define the atomic section start or end event and optional parameters (for example, the timer  $T_0$   
15 parameter discussed later).

In the particular example of a bidding service, as explained above, the supervision platform 10 will be programmed to detect the messages corresponding to  
20 steps B/ (the customer 8 sends a message to deposit a bid) and E/ (the server 13 notifies closure of the bid deposited and confirmed) according to the format of these messages adopted in the implementation of the service.

While the service is running, the supervision platform  
25 10 and the context handler 20 cooperate for example in the way illustrated in figure 2.

The setting up of a service session for a subscriber is first detected by the platform 10 (step 30), which notifies the context handler 20 of this with a session  
30 number (j), so that the latter creates a record for this session (step 31), by initializing the atomic section Boolean indicator SA(j) to the value FALSE. If the subscriber previously had no session in progress, the step 31 includes the creation of a context for the

- 17 -

subscriber with the first record. If the subscriber enters into a predefined atomic section (in our example, he deposits a bid), the corresponding message is detected by the platform 10 (step 32), which in real time notifies the context handler 20 of the start of atomic section in session number j. The context handler 20 then updates the atomic section indicator SA(j) in step 33, assigning it the value TRUE, and it notes down the time at which it was notified of the start of the atomic section. The supervision platform 10 also flags the exit from the atomic section, detected in step 34, to the context handler 20, so that the context handler can update the atomic section indicator SA(j) in step 35 by assigning it the value FALSE. Following the closure of the session, detected in step 36 by the platform 10, the context handler 20 deletes the record relating to the session j (and the context of the subscriber if the latter no longer has any 3G service session in progress).

A process of the type illustrated by figure 2 is conducted for each type of atomic section defined for each 3G service supporting the functionality.

Figure 3 illustrates an example of processing that the context handler 20 can apply following the receipt (step 40) of a communication interrupt request for an identified subscriber, for example generated by the rating system 17.

The handler 20 looks up the context that it stores for the subscriber concerned (step 41) to determine whether the latter has an atomic section in progress (SA(j) = TRUE for a session j of the subscriber). If he has, it compares the current time with the atomic section start time noted in the record j, to determine whether the atomic section began less than a predefined duration  $T_0$

- 18 -

ago, for example around one minute (step 42). If this duration  $T_0$  is not exceeded, the process returns to test 41, which means that the interrupt request is not served unless the indicator SA(j) returns to the value  
5 FALSE. The interruption of the communication is validated by the context handler 20 (step 43) only when test 41 reveals no atomic section in progress, or when the test 42 shows that the timer  $T_0$  has expired. The context handler 20 then orders the supervision platform  
10 10 to notify the customer of the impending interruption, followed by the core network 2, so that the latter can terminate the communication.

The interruption validation performed in the step 43 does not necessarily concern all the current sessions  
15 for the subscriber concerned, particularly in cases of differentiated service rating.

The interrupt request received in step 40 can in particular be selective, that is, concern only some of the sessions in progress for the subscriber, the  
20 screening of steps 41 and 42 being limited to these sessions. Such a case can occur if the rating system 17 incorporates a service cone processing logic and formulates its interrupt requests accordingly.

In another embodiment, the service cone processing  
25 logic is at least partly present in the context handler 20 which, when it receives an interrupt request for a given service, takes account of this logic when looking up the atomic section indicators and the decisions to interrupt the services.

30 The timer  $T_0$  is optional. It protects the operator against abusive use of the atomic sections by the customer. To the same end, a mechanism can also be provided to prevent the customer from beginning a new

- 19 -

atomic section in a circumstance where a communication interruption invoked by an IS component of the CC&B would not be carried out immediately because of an atomic section already in progress. The supervision  
5 platform 10 is then ordered to respond to the detection for this subscriber of an atomic section start type event by notifying him that his action cannot be pursued.

The duration  $T_0$  can be chosen at the level of the  
10 context handler 20. It can also depend on the service or the type of atomic section concerned, and be chosen by the service designer and specified to the supervision platform 10 by the agent made available to the service designer. A number of methods can then be  
15 envisaged for implementing the timer. One of these consists in the platform 10 flagging an end of atomic section to the handler 20 when the timer, counted down by this platform 10 from the start of this atomic section, has timed out. Another possibility is for the  
20 platform 10 to indicate the duration  $T_0$  to be taken into consideration to the handler 20 at the same time as it flags the start of the atomic section.

- 20 -

## CLAIMS

1. An on-line service provision method, wherein a service session supervision platform (10) is placed between an access network (1) and an input node (12) of a service-hosting network, the method comprising the following steps in relation to at least one service:
- a priori defining, in the running of said service, at least one atomic section consisting of a determined sequence of events involved in message exchanges with a subscriber, and identifying a first event at the start of the atomic section and at least one second event at the end of the atomic section; and
  - configuring the supervision platform so that it detects the events identified in a session of said service in progress for a subscriber via the access network and flags a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event,
- wherein a communication interrupt request from a subscriber is processed by ascertaining whether an atomic section is in progress for said subscriber according to the atomic section beginnings and ends flagged by the supervision platform, in order to determine whether the communication must at least partly be interrupted immediately.
2. The method as claimed in claim 1, wherein, in response to a communication interrupt request for

- 21 -

a subscriber, the immediate interruption of the communication is prevented when said subscriber has an ongoing atomic section for at least one service.

- 5 3. The method as claimed in claim 1, wherein, in  
response to a communication interrupt request for  
a subscriber, the immediate interruption of the  
communication is prevented when said subscriber  
has an ongoing atomic section for at least one  
10 service started less than a predetermined time ( $T_0$ )  
ago.
4. The method as claimed in claim 3, wherein said  
predetermined duration ( $T_0$ ) is specified to the  
supervision platform (10) for each atomic section.
- 15 5. The method as claimed in any one of the preceding  
claims, wherein a context handler (20) is provided  
to communicate with different functional units  
including the supervision platform (10), to store  
information on service sessions in progress for  
20 subscribers via the access network (1), said  
information comprising an atomic section indicator  
kept up-to-date for each subscriber based on  
atomic section beginnings and ends flagged by the  
supervision platform.
- 25 6. The method as claimed in any one of the preceding  
claims, wherein the access network comprises a  
cellular radio communication network (1).
7. The method as claimed in any one of the preceding  
claims, wherein the input node of the service-  
30 hosting network comprises an Internet portal (12).
8. An on-line service control system, comprising a

- 22 -

service session supervision platform (10) placed between an access network (1) and an input node (12) of a service-hosting network, and a context handler (20) to communicate with different functional units including the supervision platform in order to store information on service sessions in progress for subscribers via the access network, wherein at least one atomic section consisting of a determined sequence of events which are involved in message exchanges with a subscriber is a priori defined in the running of at least one service by identifying a first event at the start of the atomic section and at least one second event at the end of the atomic section, the supervision platform (10) including means for detecting the events identified in a session of said service in progress for a subscriber via the access network and for flagging to the context handler (20) a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event, the context handler including means of keeping an atomic section indicator stored for each subscriber up-to-date on the basis of atomic section beginnings and ends flagged by the supervision platform and of processing a communication interrupt request from a subscriber according to the atomic section indicator stored for said subscriber in order to determine whether the communication must at least partly be interrupted immediately.

9. A service session supervision platform for an on-line service control system, comprising:

- means of connection on the one hand to an access network (1) and on the other hand to



- 23 -

an input node (12) of a service-hosting network;

- 5       - means for communicating with an application server managing at least one on-line service so as to receive from said application server specification elements of at least one atomic section consisting of a determined sequence of events involved in message exchanges with a subscriber in the running of at least one  
10       service, said specification elements describing a first event at the start of the atomic section and at least one second event at the end of the atomic section;
  - 15       - means of analyzing traffic passing between the access network and the input node of the service-hosting network to detect said first and second events in a session of said service in progress for a subscriber via the access network; and
  - 20       - means of communication with a context handler (20) storing information on service sessions in progress for subscribers via the access network, including at least one atomic  
25       section indicator, to flag to the context handler (20) a start of atomic section for said subscriber in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event.
- 30   10. The supervision platform as claimed in claim 9, wherein the specification elements of at least one atomic section include a timer duration ( $T_0$ ) associated with said atomic section, such that the atomic section is considered to be finished when  
35       the timer duration has elapsed since the start of

- 24 -

the atomic section.

11. A context handler for an on-line service control system, comprising:

- 5           - means of communication with different functional units including a service session supervision platform (10) placed between an access network (1) and an input node (12) of a service-hosting network;
- 10          - means of storing information on service sessions in progress for subscribers via the access network, said information including, for at least one service session in progress for a subscriber, an atomic section indicator kept up-to-date on the basis of atomic  
15           section beginnings and ends flagged by the supervision platform; and
- 20          - means of processing a communication interrupt request from a subscriber according to the atomic section indicator stored for said subscriber in order to determine whether the  
communication must at least partly be interrupted immediately.

12. The context handler as claimed in claim 11, wherein the interrupt request processing means are  
25           arranged to determine selectively which current sessions for the subscriber are to be interrupted.

13. The context handler as claimed in claim 12, wherein the selective determination is performed on the basis of sessions specified in the  
30           interrupt request, taking into account atomic section indicators stored for the subscriber.

14. The context handler as claimed in claim 12,

- 25 -

wherein the selective determination is performed according to a predefined service hierarchy logic, taking into account atomic section indicators stored for the subscriber.

- 5 15. A software agent for an on-line service developer, comprising instructions for performing the following operations on running the software agent in a computer machine communicating with a service session supervision platform (10) placed between  
10 an access network (1) and an input node (12) of a service-hosting network:
- 15 - determination, in the running of a service, of at least one atomic section consisting of a determined sequence of events involved in message exchanges with a subscriber;
  - identification of a first event at the start of the atomic section and of at least one second event at the end of the atomic section; and
  - 20 - configuration of the supervision platform so that it detects the events identified in a session of said service in progress for a subscriber via the access network and flags a start of atomic section for said subscriber  
25 in response to the detection of the first event and an end of atomic section for said subscriber in response to the detection of a second event.
- 30 16. The software agent as claimed in claim 15, wherein the supervision platform (10) configuration operation performed on running the software agent includes a configuration of the supervision platform so that it flags atomic section beginnings and ends to a context handler (20)

- 26 -

storing information on service sessions in progress for subscribers via the access network, including at least one atomic section indicator.

- 5 17. The software agent as claimed in claim 15 or 16,  
wherein the supervision platform (10)  
configuration operation performed on running the  
software agent includes the specification of a  
timer duration ( $T_0$ ) associated with at least one  
10 atomic section, such that the atomic section is  
considered to be ended when the timer duration has  
elapsed since the start of the atomic section.

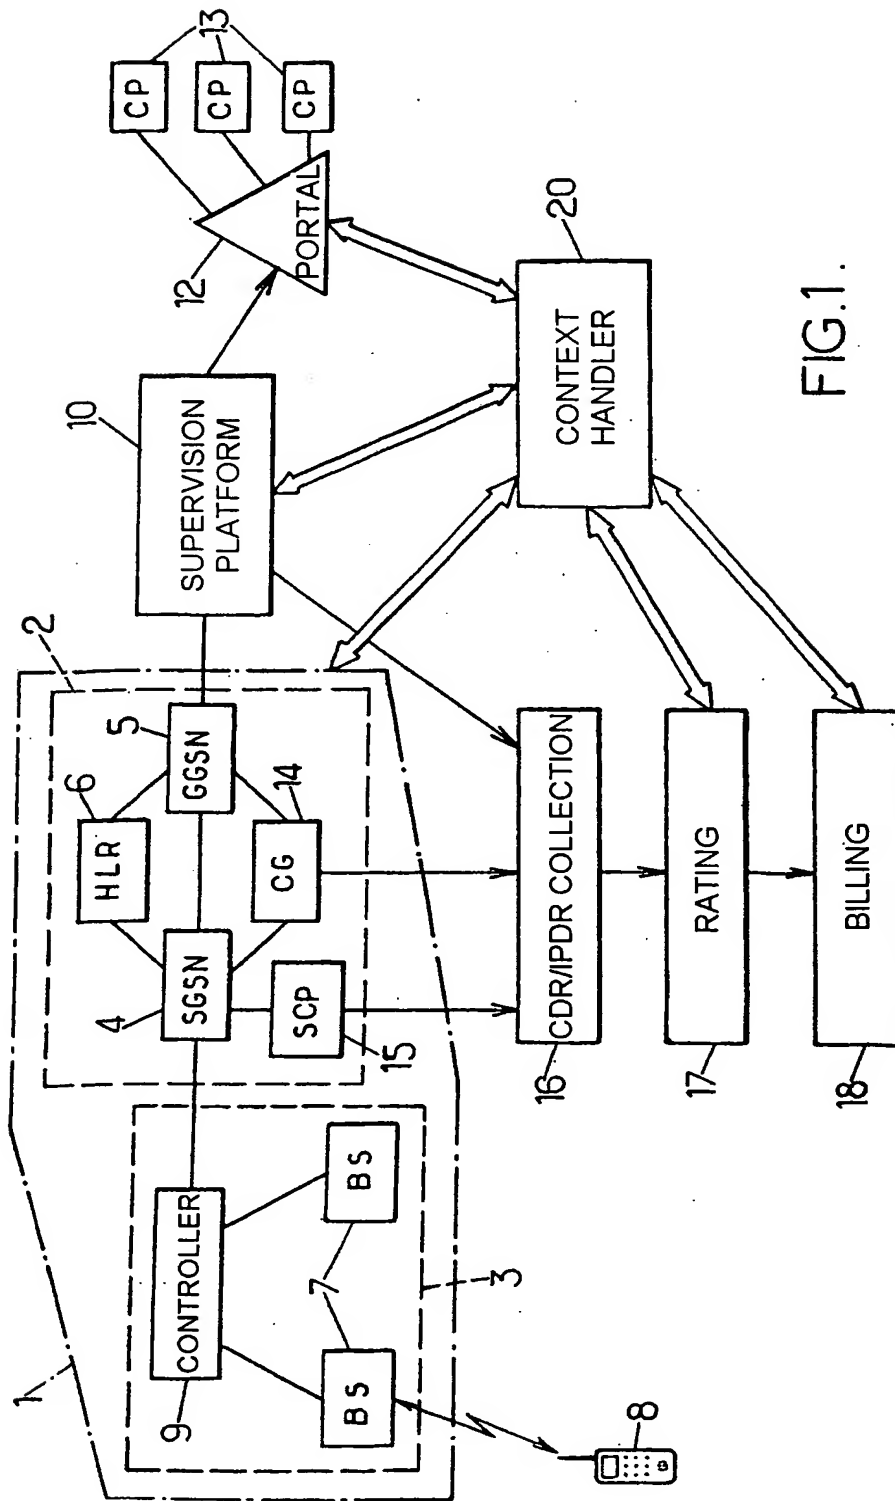


FIG.1.

FIG. 2.

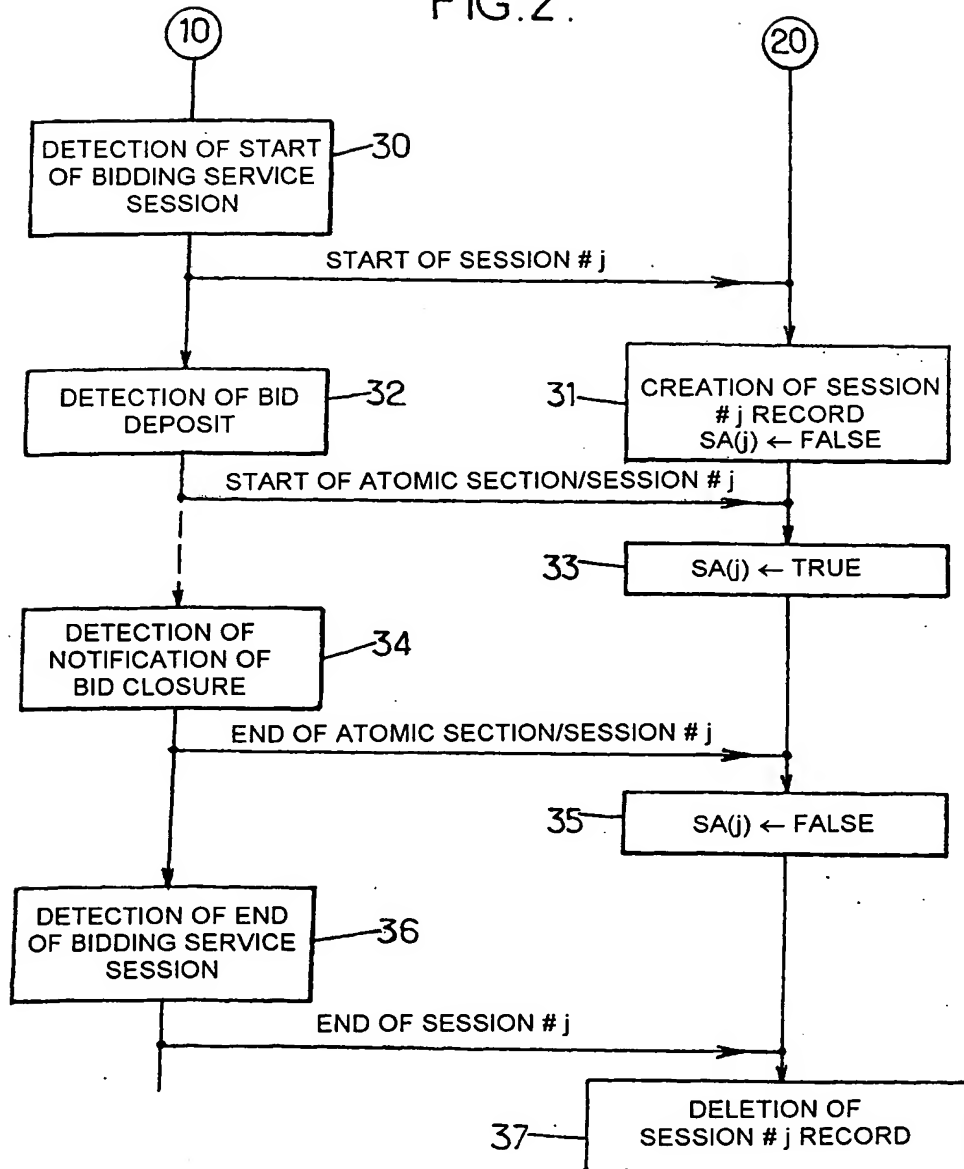


FIG. 3.

